
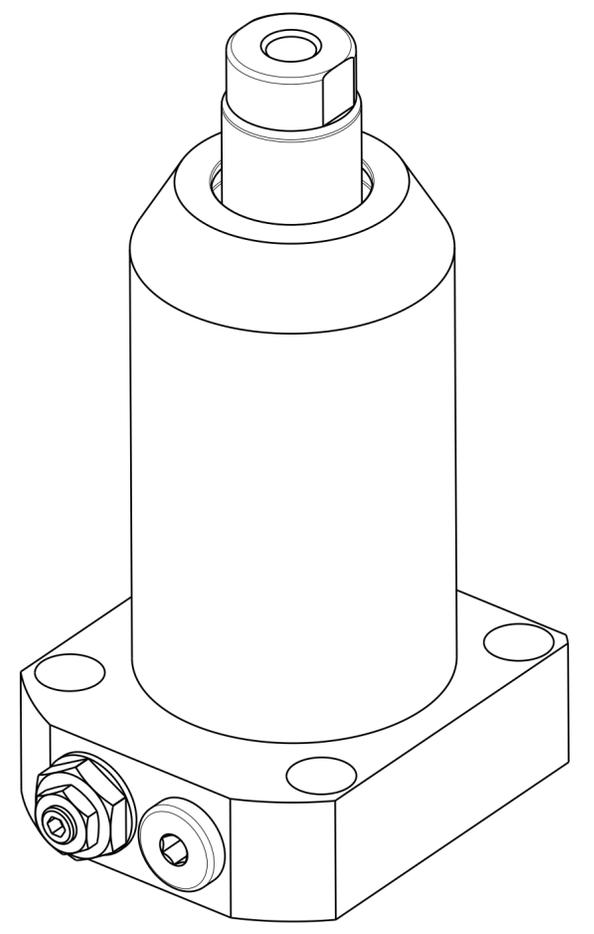
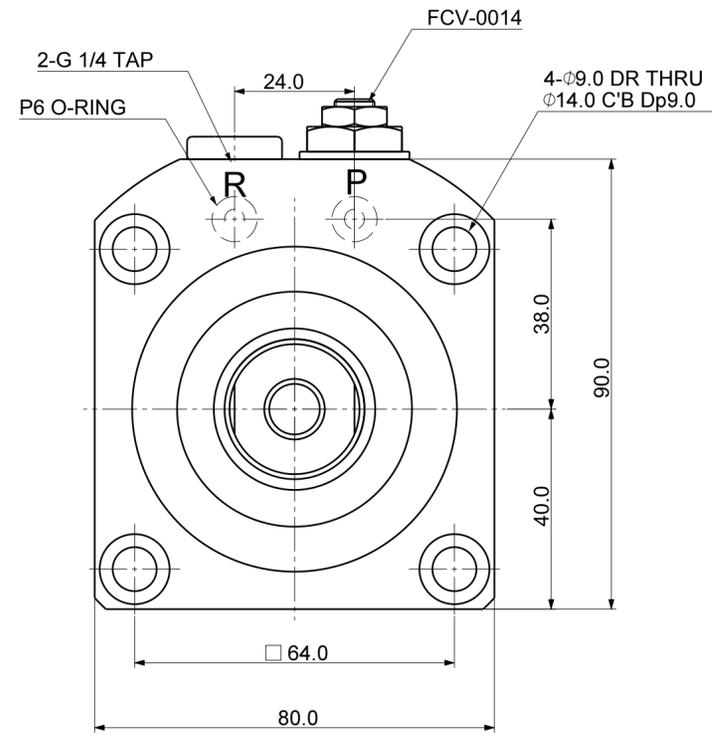
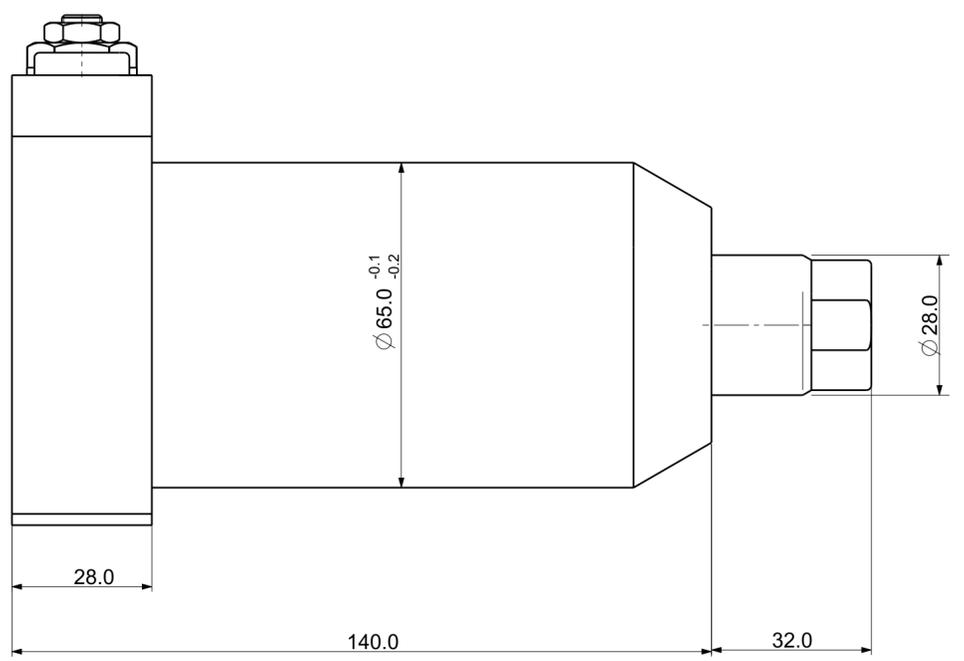


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

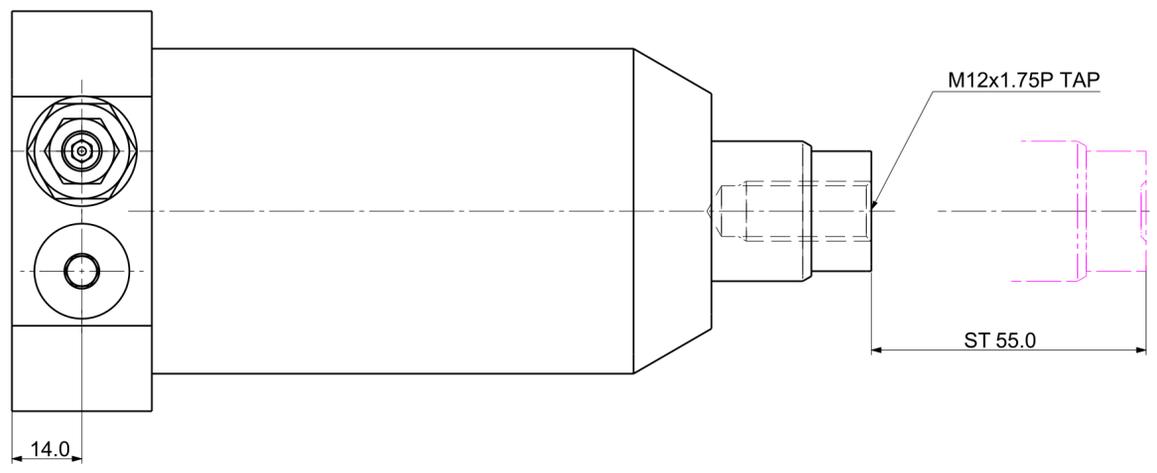

Isometric view (1:1)

NOTE

1. MODEL No : SDP-4055FGV
2. OPERATING PRESSURE : 15~250 Kg/cm²)
3. OPERATING TEMPERATURE : 0~60 °C
4. EFFECTIVE AREA(Cm²) : PUSH=12.56 , PULL=6.41
5. PISTON DIAMETER : φ40.0
6. ROD DIAMETER : φ28.0

DET.NO	NAME	Q'TY	MAT'L	FINAL SIZES & PART No	REMARK
UNLESS OTHERWISE SPECIFIED	SIGNATURES	MO-DA-YR	 FLANGE CLAMP		
DIMENSIONS ARE IN MM	DRAWN				
ALL SURFACES 6.3s	CHECKED				
TOLERANCES	APPROVED				
ANGLE ±			REF DWG NO.	DWG NO	A2
.X ± 0.15			-	SDP-4055FGV_-	
.XX ±			SCALE	TOOL <input type="checkbox"/> PART <input type="checkbox"/> SHEET <input type="checkbox"/> OF	
FINISH	WORK ORDER NO				
HEAT TREAT					