

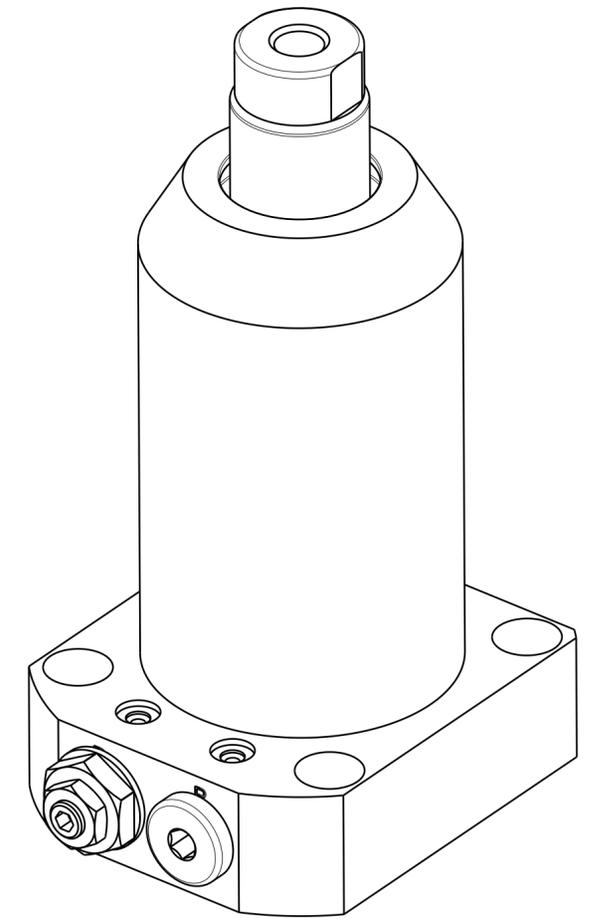
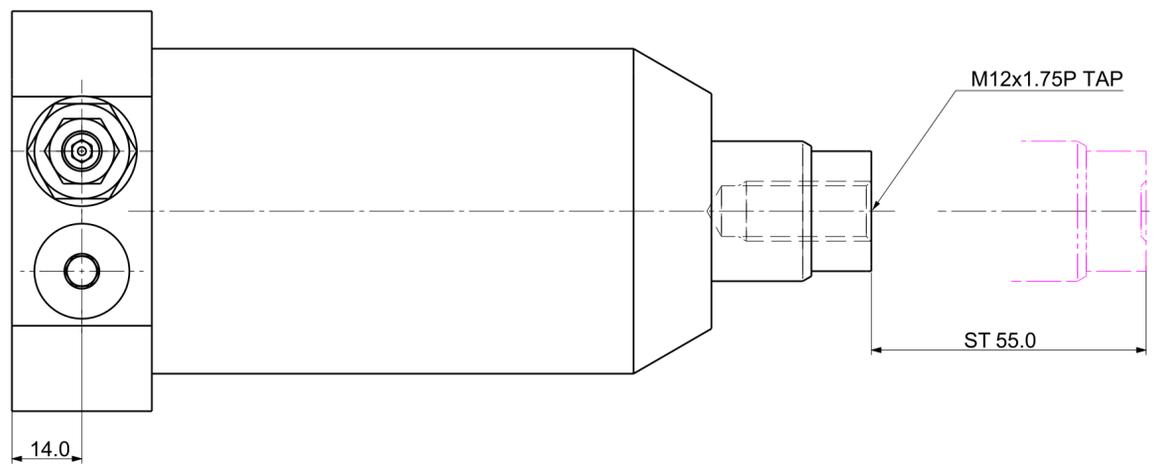


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

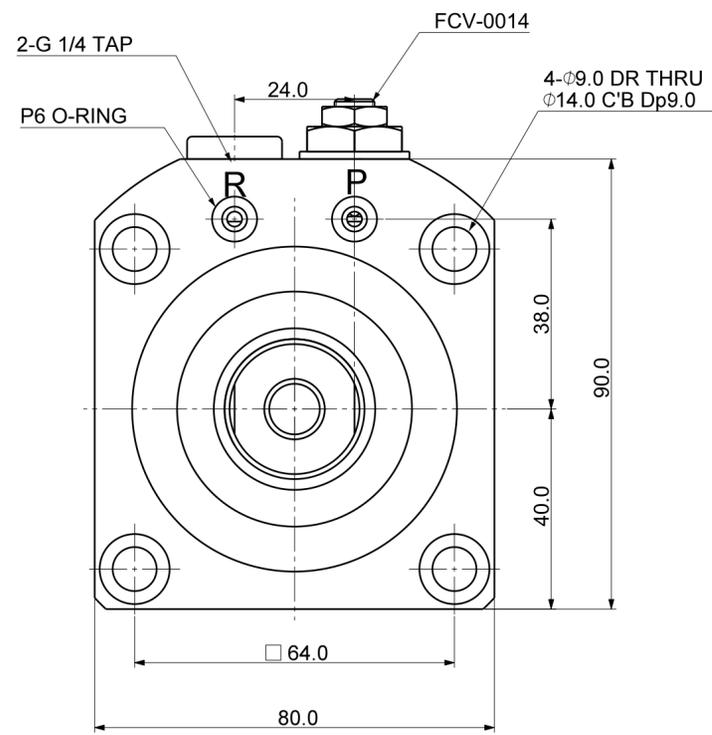

Isometric view (1:1)

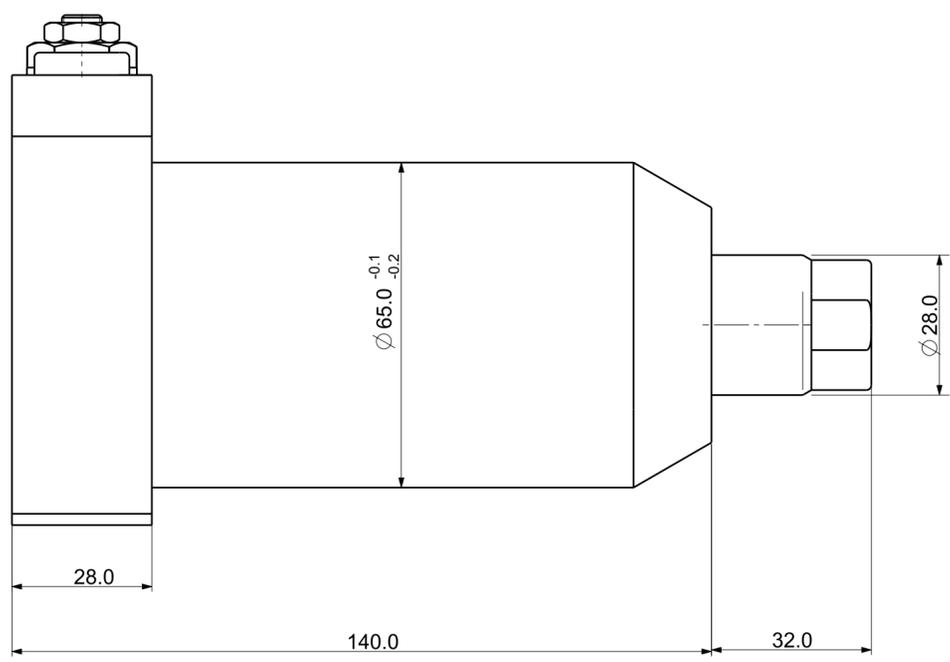

NOTE

1. MODEL No : SDP-4055FGVT
2. OPERATING PRESSURE : 15~250 Kgf/cm²)
3. OPERATING TEMPERATURE : 0~60 °C
4. EFFECTIVE AREA(Cm²) : PUSH=12.56 , PULL=6.41
5. PISTON DIAMETER : φ40.0
6. ROD DIAMETER : φ28.0

DET.NO	NAME	Q'TY	MAT'L	FINAL SIZES & PART No	REMARK
UNLESS OTHERWISE SPECIFIED	SIGNATURES	MO-DA-YR	 FLANGE CLAMP		
DIMENSIONS ARE IN MM	DRAWN				
ALL SURFACES 6.3s	CHECKED				
TOLERANCES	APPROVED				
ANGLE ±			REF DWG NO.	DWG NO	OF
.X ± 0.15			-	SDP-4055FGVT_-	A2
.XX ±			SCALE	TOOL	PART
FINISH	WORK ORDER NO	SCALE / TOOL <input type="checkbox"/> PART <input type="checkbox"/> SHEET OF			
HEAT TREAT					